





Series 1500 & 4500 Control Valves



Panel mounted
1500 Control
4500 Metering





Stud mounted
1510 Control
4510 Metering



Barb Adaptors
TC271 3/16in Tube
TC273 1/4in Tube

Drallim miniature valves are also suitable for soft plastic tubing using special barb spigot adaptors.

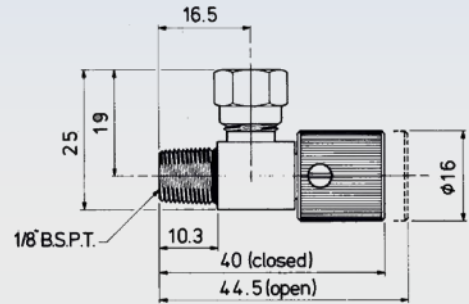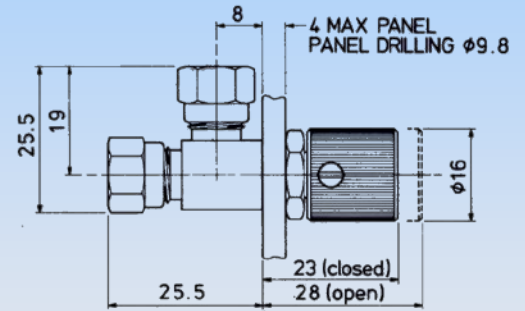

Technical Data	
Fluids	Air and other gases, vapours and liquids compatible with the materials of construction.
Pressures	-1 to +10 bar
Temperatures	-15 to +60°C, dependant on o-ring and tube seal materials.
Materials	Bodies - Brass Stems - 1500 Delrin 4500 316 stainless steel Metering orifice – P.T.F.E Springs - Stainless steel

Ordering Code	
Connector Size	
Tube OD	
1/8in	R
3/16in	A
1/4in	B
4mm	004
5mm	005
6mm	006
O-Ring Material	
Nitrile	NE
Viton	VN
Type Designation	
Control	
Panel	1500
Stud	1510
Metering	
Panel	4500
Stud	4510
EXAMPLE 1500 NE B	