



Drallim Industries Limited
Millwood House, Drury Lane,
Ponswood Industrial Estate,
St. Leonards on Sea,
East Sussex. TN38 9BA, UK


t +44(0)1424 205140
f +44(0)1424 202140
e email@drallim.com
w www.drallim.com



An ISO 9001:2008 Approved Company
Registered Office: Registered in England No.606278

WAVEGUIDE DEHYDRATOR TYPE 12445/L

DATA SHEET

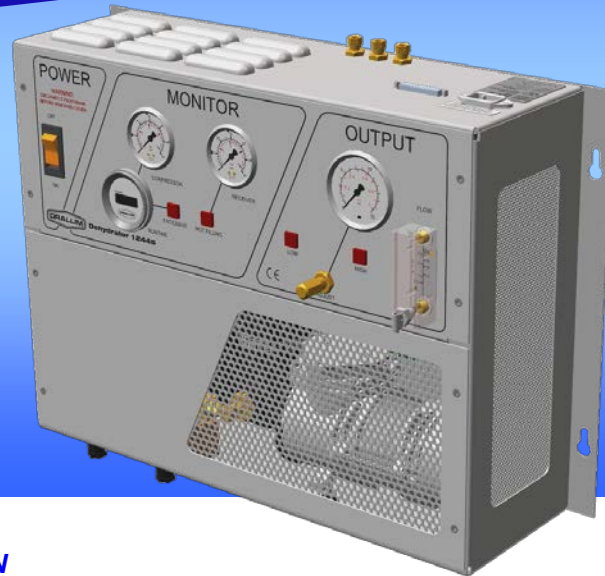

PRODUCT SPECIFICATION

| | | | |
|--------------------|--|------------|---|
| 1 | Environmental Considerations | 3 | Dry Air Output |
| Operating Voltage | 230V A.C. 50Hz single phase Removable mains lead and plug supplied. | Pressure | 0.5 - 5.0 psi controlled by front panel mounted tamperproof (relieving type) regulator. |
| | Current consumption – maximum: 1.9A | Flow | 35 ft ³ /hr at any set output pressure. |
| Temperature | Ambient operating temp. 0 to 38°C (32-100°F) | Dewpoint | Better than -35°C. |
| Dimensions | 530mm wide x 430mm high x 225mm deep. | Connection | 3 male output bulkhead couplings, intended for 6.35mm (1/4") OD flexible hose, Supplied with 3 off union nuts and 2 blanking plugs. |
| Fixings | Wall mounting. Mounting Template supplied. Slots provided either side for attachment to wall or other flat/even surface. Brackets extend 25mm either side. | | |
| Mass | 25kg | 4 | Alarm Indication |
| Noise Level | Typically 68 dBA at 1 metre | Visual | High Humidity (Red) ie output being bypassed to atmosphere. Low Output pressure (Red) adjustable, factory set at approx. 0.5 psi. High Output pressure (Red) adjustable, factory set at approx. 4.5 psi. Excessive runtime alarm, user adjustable between 0.1 sec and 10 hours. |
| 2 | Operational Features: | Extended | 25 Way "D" type connector provided to enable remote indication of all normally open and normally closed volt free contacts provided for each of: a. Mains Fail b. High Humidity (vessel/w.guide not filling) c. Low Output Pressure d. High Output Pressure e. Excessive Runtime |
| Compressor | 1/3HP rocking piston pump (100psi max.) Stop/start pressure 30 - 65 psi. Safety relief valve (set at 125psi) fitted to protect equipment against overpressure. Minimal transmission of vibration - compressor fitted via rubber mounts. | | |
| Air Drier | Twin bed heatless pressure reactivated adsorption type. Each bed on line 1 min / regenerating 1 min. Automatic changeover by electro-mechanical process timer with memory. Desiccant, grade 4A molecular sieve, 3-5mm. Inlet and outlet filtration by sintered 35 micron bronze filters at each drier bed port. Output dewpoint detection circuit with associated indication facilities | 5 | Monitoring/Control |
| Humidity Detection | Automatic bypass to atmosphere of any insufficiently dried air. Set to operate at -18°C Fail safe operation | Electrical | Combined on/off switch/lamp and circuit breaker incorporating thermal protection rated at 5.0A Total running hour meter to indicate compressor usage, permanent LCD display |
| Dry Air Storage | Internal moulded polyethylene air storage vessel provides a 0.7 litre reserve of dry air. Moulded from flame retardant material. | Pneumatic | "Compressor" pressure gauge 0-100psi. "Receiver" pressure gauge 0-100psi. 63mm dia. "Output" pressure gauge 0-15 psi. Total flow indicator 0-40 ft ³ /hr. Tamperproof precision output regulator (accurate within 10mbar over operational range of equipment). |